



CASTER REPLACEMENT POWER PATIENT LIFT

1. Peel off the tape cover on the head of the Allen head bolt.



2. Use a 6mm Allen wrench on the head of the bolt and a 17mm socket or wrench on the nut.

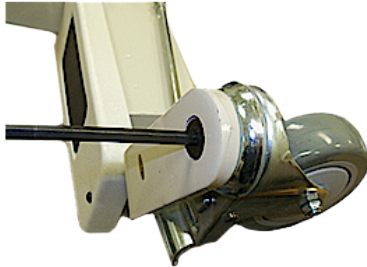

3. Turn the wrench counterclockwise to remove the nut and the wheel will come off. Reverse this procedure to install the replacement wheel.