


# BL100

## UPPER MOTOR MOUNT REMOVAL

Put four 10p nails in each of the holes on the bolt caps and using two screw drivers, placed as shown, unloosen the retaining bolt.

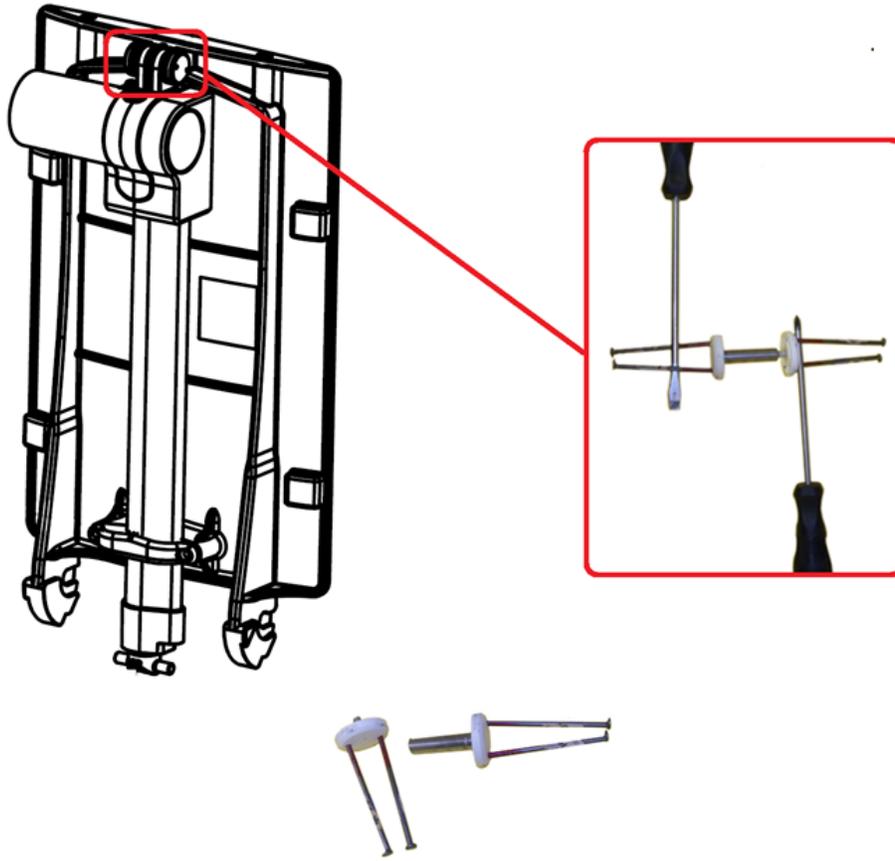

Home