

KG 1048 - How to install BACK RELEASE ASSEMBLY


1. Fold down back. (Handle removed from backrest bracket for easier viewing. **(DO NOT REMOVE FROM BRACKET)**)



2. Turn the release handle counterclockwise to remove.




3. Pull out locking latch.

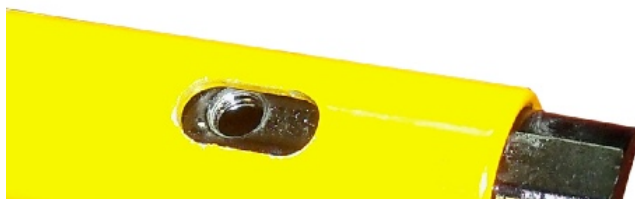



4. Pull out the spring if it did not come out with the latch.

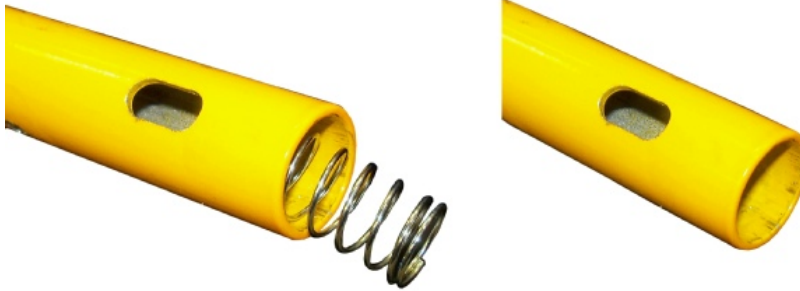

5. Install in reverse order.

[Home](#)