

15601, 15801 & 15803 LTC BEDS ASSIST BOARDS INSTALLATION

1. Verify that all parts are present.




2. Raise the head of the bed about half way.



3. Place the 15625 Assist Bar under the head section of the bed between the two cross supports. Align the holes in the assist bars and the

holes in the two cross bars.

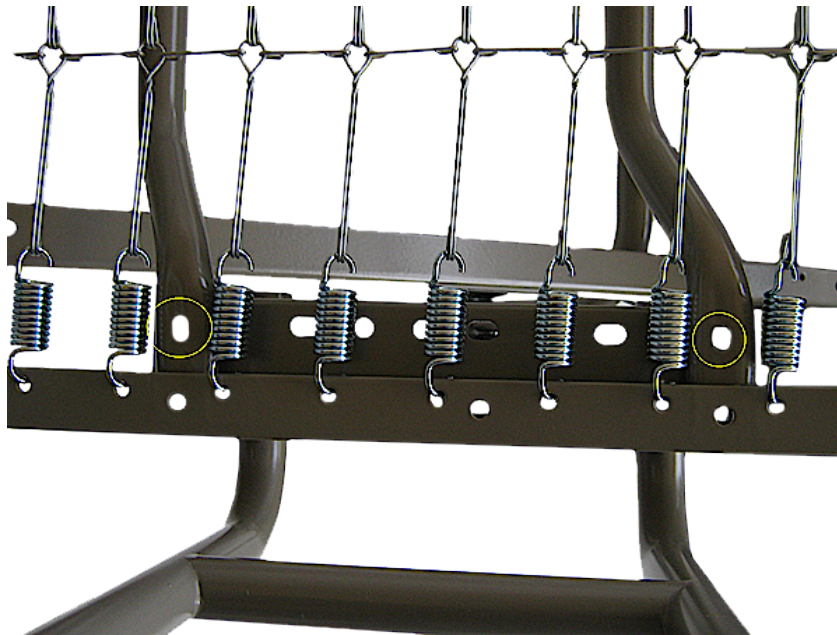

4. Install a cap screw through each of these holes. Install a nut on each of the two cap screws.



5. Tighten the nuts on each of the two caps screws. The Assist Bar is now ready to use.





Home