

# TRID-2A40 HOW TO INSTALL

1. Remove seat from Trident




2. Remove all four seat brackets.



3. Position the TRID-2A40 ELR adapter on seat frame of the chair. Using four screws from the seat brackets previously removed; loosely thread them through the adapter plate to the seat frame.



4. Tighten all four screws.

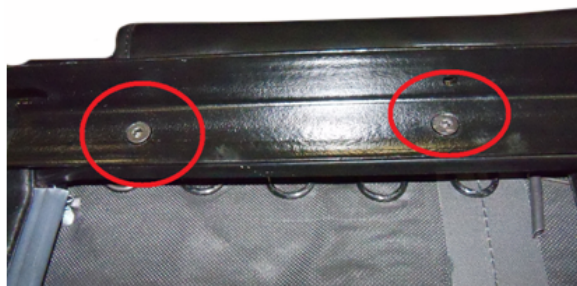



5. Install the seat on to the frame of the Trident and install the SFELR adapter.



[Home](#)